

Overview

QuickServer is a high performance, fully configurable, cost effective Building and Industrial Automation gateway for integrators to easily interface devices to networks in commercial buildings and industrial plants.

System integrators world-wide have benefited from the value of the powerful line of interoperability gateways offered by FieldServer. Now, QuickServer adds to that value by running the same robust FieldServer protocol conversion software on a highly cost-effective platform backed by the experience, engineering expertise and proven technical support that integrators have come to expect from FieldServer.

QuickServer is available in two series. The FS-QS-10XX-F Series is preloaded with two BAS drivers (serial, Ethernet and/or LonWorks) from a choice of Modbus RTU, Modbus TCP/IP, BACnet/IP®, BACnet MS/TP, LonWorks®, JCI Metasys® N2 and SNMP. Each QuickServer can handle up to 250 points.

The FS-QS-12XX-F Series QuickServer is available to use any Serial, Ethernet or LonWorks driver in the extensive FieldServer driver library. The FS-QS-12XX-F Series can handle up to 500 points and is available with a choice of RS-485, RS-232, KNX or M-Bus, in addition to Ethernet and LonWorks (optional). The FS-QS-13XX-F and FS-QS-14XX-F have the same port options but the 13XX-F can support up to 3,000 points while the 14XX-F can support up to 5,000.

Each QuickServer includes browser-based tools to make it easy to set-up QuickServer and perform diagnostics including determination of status, network settings, node information, map descriptors and more. The USB flash drive also includes the Discovery utility to determine what FieldServers are on a network.




Serial/Ethernet



LonWorks

QuickServer Features and Benefits

- Interface 250-5,000 device points (see Specifications).
- Multi-configuration capability; configurations selectable via DIP switches or software.
- Flat panel mount standard, DIN rail mount option.
- DIP switches select baud rate or node ID on the fly.
- Supports OEM proprietary protocols to BMS.
- BACnet COV support for fast data communication while reducing the traffic over a BACnet network.
- **MSA Grid - FieldServer Manager** registration connects your devices to the cloud, allowing secure remote access for diagnostics, monitoring, alarming and configuration.
- On-board diagnostics allow easy troubleshooting for both serial and Ethernet communications.
- **FieldSafe** adds a wealth of security options, including: web configuration page authentication (self-signed certificates), robust user and password management features.

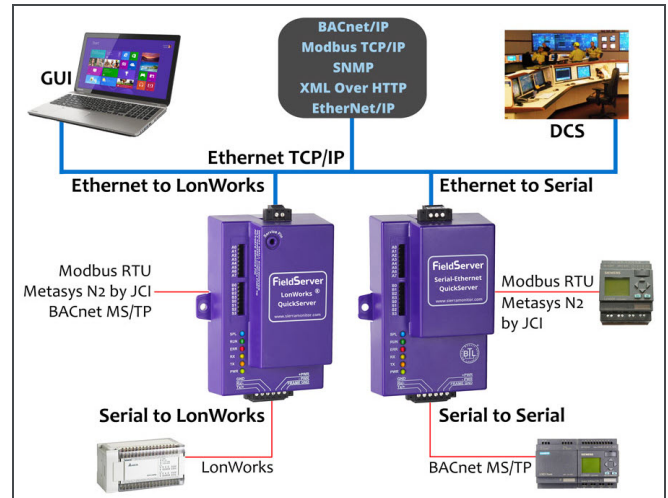

FieldServer Offers

- Largest protocol driver library in the industry, providing the solution to your integration needs.
- Over 10 years of experience in design and manufacture of building automation gateways with thousands of installations, over 700 translation paths using over 100 protocol drivers.
- Trusted, proven technical support before and after shipment.
- FieldServer partners with BAS and Fire Alarm Panel manufacturers and trade associations to ensure that the drivers and hardware meet your highest industry expectations.

Accessories

- Optional Accessory Kit includes AC power supply, DIN mounting bracket assembly, Ethernet cable, mini-screwdriver and a USB flash drive with all data sheets, manuals, notes, the discovery tool and more.

QuickServer	Interface Connections					
	RS-232 ¹	RS-485 ²	KNX ⁵	M-Bus	Ethernet ³	LonWorks ⁴
FS-QS-1X11-F		1			1	1
FS-QS-1X21-F	1				1	1
FS-QS-1X40-F		1	1		1	
FS-QS-1X41-F			1		1	1
FS-QS-1X50-F		1		1	1	
FS-QS-1X51-F				1	1	1

¹ TX/Rx/GND ² +/-Frame Ground ³ 10/100 Base T ⁴ FTT10 ⁵ KNX/EIB TP1

Hardware Specifications

Power Requirements

12-30 VDC or 12-24 VAC

Current Draw: FS-QS-12X0-F: @ 12V = 240 mA
FS-QS-1X11-F, FS-QS-12X1-F: @ 12V = 250 mA

M-Bus: Slave: 550 mA @ 12V
Master (1 Slave): 580 mA @ 12V
Master (64 Slave): 980 mA @ 12V

Environment

Operating Temperature: -40 to 75°C (-40 to 167°F)

Relative Humidity: 10-90% RH non-condensing

Serial Port Isolation

- 1500v galvanic isolation

Physical Dimensions

H x W x D: 4.5 x 2.9 x 1.6 in. (11.5 x 7.4 x 4.1 cm)

Weight: 0.4 lbs (0.2 Kg)

Other

Configuration/Diagnostic utilities
Table, Wall or DIN rail mount

Communication

Baud: 4800, 9600, 19200, 38400, 57600, 115200

Start Bit: 7, 8 **Stop Bit:** 1, 2 **Parity:** Even, Odd, None

LonMark Certification (FS-QS-1XX1-F)

SPID: 80:00:95:46:00:84:04:01

Profiles: 0000 – Node object (1)

0001 – Open Loop Sensor Object (5)

0003 – Open Loop Actuator Object (5)

Ethernet: 10/100 BaseT

Approvals

CE and FCC Part 15 B & C

BACnet marked

LonMark certified (FS-QS-1011-F and FS-QS-12X1-F)

UL 62368-1 and CAN/CSA C22.2 No. 62368-1

IEC 62368-1 and EN IEC 62368-1 compliant

GOST-R and KC certified

DNP 3.0 and Modbus conformance tested

RoHS3, WEEE, UKCA and ODVA conformant



Ordering Information

- FS-QS-11XX-F: 250 data points
- FS-QS-12XX-F: 500 data points
- FS-QS-13XX-F: 3000 data points
- FS-QS-14XX-F: 5000 data points

Options

The Accessory Kit consists of a power supply, Ethernet cable, screwdriver, DIN rail mount and a USB flash drive that includes all manuals, data sheets, notes and the discovery tool.

FS-8915-36-QS Accessory Kit, 110/220V

Warning: This equipment is compliant with Class A of CISPR 32. In a residential environment, this equipment may cause radio interference

BACnet® is a registered trademark of ASHRAE
LonWorks® is a registered trademark of Echelon Corp
Metasys® is a registered trademark of Johnson Controls, Inc.
KNX is a trademark of KNX Association

MSA Safety

1000 Cranberry Woods Drive, Cranberry Township, PA 16066 USA
O. +1 408 964-4443 TF. +1 800 727-4377 E. SMC-insidesales@msasafety.com
www.MSAsafety.com